

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 500.39008X00  
First Inventor or Application Identifier Ken WATANABE  
Title See 1 in Addendum  
Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 53] 1  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Statement Regarding Fed sponsored R & D  
- Reference to Microfiche Appendix  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 13] 1
4. Oath or Declaration [Total Pages ] 1  
a. ☐ Newly executed (original or copy)  
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)  
i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of  
(when there is an assignee) ☐ Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 ☐ Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity ☐ Statement filed in prior application  
Statement(s) ☐ Status still proper and desired  
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☒ Other: See 2 in Addendum

\* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY  
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT  
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No: /

Prior application information: Examiner

Group / Art Unit:

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

020457

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name			
Address			
City	State	Zip Code	
Country	Telephone	Fax	

Name (Print/Type) Carl I. Brundidge

Registration No. (Attorney/Agent) 29,621

Signature

Date 9-01-00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Attachment to PTO/SB/05 (4/98) Utility Patent Application  
Transmittal

1. METHOD FOR SENDING NOTICE OF FAILURE DETECTION
2.
  - Info. Discl. Sheet Under 37 CFR 1.56 w/refs
  - Credit Card Payment Form
  - Figs. 1-13

001060" 6804560

This invention relates to a method for sending a notice of failure detection. More particularly, this invention relates to a method for sending a notice of failure detection in a system wherein apparatuses A and B are connected by a pair of two independent transfer paths, that is, a transfer path for transmitting data from the apparatus A to the apparatus B and a transfer path for transmitting the data from the apparatus B to the apparatus A, and the data are communicated mutually between these two apparatuses.

In apparatuses for executing data communication by using twist-pair cables or optical fiber cables in accordance with the system stipulated by IEEE802.3 (IEEE: The Institute of Electrical and Electronics Engineers), two apparatuses are point-to-point connected by one cable. The term "apparatus" used hereby means an inter-network apparatus such as a computer, a hub accommodating therein a computer, a router, a LAN switch, and so forth. Let's consider, for example, a case where computers are accommodated in a network connection apparatus called "a LAN switch" by using twist-pair cables. When two apparatuses are called hereby the "apparatus A" and "apparatus B", the cable that connects these apparatuses A and B includes a

15           The communication system described above has a  
setup for detecting whether or not the two apparatus  
connected by the cables are under the communicable  
condition. In other words, the apparatus A not only  
transmits data to the transfer path for transmitting the  
20 data to the apparatus B but transmits either periodically  
or steadily a specific signal different from the data  
during the period in which it does not transmit the data.  
On the other hand, the apparatus B always monitors the  
transfer path for receiving the data, detects the data or  
25 the specific signal different from the data transmitted  
from the apparatus A and thus confirms that data can be  
transmitted from the apparatus A to the apparatus B. A  
signal called "link pulse" is mainly used in the system

15           The communication system described above has a  
setup for detecting whether or not the two apparatus  
connected by the cables are under the communicable  
condition. In other words, the apparatus A not only  
transmits data to the transfer path for transmitting the  
20 data to the apparatus B but transmits either periodically  
or steadily a specific signal different from the data  
during the period in which it does not transmit the data.  
On the other hand, the apparatus B always monitors the  
transfer path for receiving the data, detects the data or  
25 the specific signal different from the data transmitted  
from the apparatus A and thus confirms that data can be  
transmitted from the apparatus A to the apparatus B. A  
signal called "link pulse" is mainly used in the system

using the twist-pair cable. In a system that uses the optical fiber cable, there is a method that utilizes an idle signal sent for reproducing the reception clocks. Receiving these signals, the apparatus B can know whether  
5 or not the apparatus A and the transfer path for transmitting the data from the apparatus A to the apparatus B operate normally. A similar processing is executed, too, on the transfer path for transmitting data from the apparatus B to the apparatus A. In consequence, it is  
10 possible to know that the transfer paths between the apparatus A and the apparatus B are connected correctly and that no failure occurs in the mating apparatus, hence the apparatuses A and B are under the communicable condition.

#### SUMMARY OF THE INVENTION

15 In the background art technologies, the apparatus A monitors the signals of a transfer path for receiving data transmitted from the apparatus B. Therefore, the apparatus A can know a failure of the transfer path for transmitting data from the apparatus B to the apparatus A  
20 when it detects the non-arrival of a signal from the apparatus B. However, the apparatus A cannot detect by itself a failure of the transfer path for transmitting data from the apparatus A to the apparatus B. IEEE802.3 defines, as "remote failure report function of auto-  
25 negotiation", means for reporting a failure to the apparatus A by modifying a signal to be sent to the transfer path for transmitting data to the apparatus A when the

0054069.000100



invention to switch at a high speed and reliably the whole system by employing a dual system.

When a plurality of interfaces are grouped and incorporated inside an apparatus, it is a further object of the present invention to bring the operation into the operation stop condition for each group by only transmission/reception of simple signals when a failure is detected in another path inside the group or in the apparatus.

10 In the present invention, some signals are transmitted for confirming the connection condition of both apparatuses or transmitting clocks even when data is not transmitted through the transfer paths that connect two apparatuses. All the apparatuses support the function of  
15 monitoring signals transmitted to a transfer path on the reception side and detecting whether the reception side transfer path is under a state where it can execute the data transmission. Therefore, let's consider a case, for example, where the apparatus A detects the occurrence of a  
20 failure in a transfer path for receiving data from the apparatus B. At this time, the apparatus A intentionally stops sending all the signals to the transfer path for transmitting data to the apparatus B. On the other hand, the apparatus B judges that any failure occurs in the  
25 transfer path for receiving the data from the apparatus A. As a result, both apparatuses can reliably detect the occurrence of the failure even when the failure occurs in only a unidirectional transfer path of the transfer paths

Variable	Mean	SD	Min	Max
Age	35.2	12.5	18	65
Gender	1.2	0.4	1	2
Marital status	1.5	0.5	1	3
Education	12.5	2.5	9	16
Income	15.2	3.5	10	25
Occupation	1.8	0.8	1	3
Religion	1.5	0.5	1	3
Health status	1.2	0.4	1	2
Smoking status	1.5	0.5	1	3
Alcohol consumption	1.2	0.4	1	2
Exercise frequency	1.5	0.5	1	3
Stress level	1.8	0.8	1	3
Sleep quality	1.5	0.5	1	3
Appetite	1.2	0.4	1	2
Weight change	1.5	0.5	1	3
Blood pressure	115/75	10/5	90/60	140/90
Cholesterol level	180	40	120	240
Blood sugar level	95	15	70	120
Heart rate	72	10	60	90
Respiratory rate	18	3	12	24
Oxygen saturation	98	2	95	100
Visual acuity	20/20	5	20/30	20/40
Hearing ability	20 dB	5	10	30
Balance	1.5	0.5	1	3
Coordination	1.2	0.4	1	2
Reaction time	0.25	0.05	0.20	0.30
Attention span	15	5	10	20
Memory recall	1.5	0.5	1	3
Problem solving	1.2	0.4	1	2
Decision making	1.5	0.5	1	3
Emotional stability	1.2	0.4	1	2
Self-esteem	1.5	0.5	1	3
Life satisfaction	1.2	0.4	1	2
Overall health	1.5	0.5	1	3

[illegible][illegible][illegible][illegible][illegible]



Fig. 3 is a flowchart showing a processing flow of the apparatus equipped with the line failure detection/reporting system from the normal operation start condition to the operation stop condition upon detecting a failure;

Fig. 5 is a system diagram showing a structural example of a network system using a line failure detection/reporting system according to the second embodiment of the present invention;

Fig. 7 is a diagram showing an example of the condition shift of an interface using the line failure  
20 detection/reporting system according to the first embodiment;

Fig. 9 is a flowchart using an example of the processing flow from the normal operation condition to the operation stop condition when the line failure detection/

reporting system according to the second embodiment detects the failure of its own interface;

Fig. 10 is a flowchart showing an example of the processing flow from the normal operation condition to the operation stop condition when the line failure detection/ reporting system according to the second embodiment detects a failure of another interface belonging to the same group and stops the operation;

Fig. 11 is a flowchart showing a processing flow of a higher layer control portion when the whole circuit control portion belonging to the group including a failure- occurring line reaches the operation stop condition in the failure detection/reporting system according to the second embodiment;

Fig. 12 is a flowchart showing a processing flow of the higher control portion when the whole circuit control portion returns to the operation condition as the failure in the failure-occurring line as the cause of the operation stop of the overall group is eliminated, in the line failure detection/reporting system according to the present invention; and

Fig. 13 shows a structural example of a table of group storage means in the line failure detection/reporting system according to the second embodiment.

## DESCRIPTION OF THE EMBODIMENTS

The first embodiment of the present invention will be explained. In this embodiment, one cable

5

tuses A and B will be explained with reference to Fig. 1.

10 This drawing shows an example of an apparatus equipped with

a line failure detection/reporting system according to the

apparatuses. Each apparatus A1000 (B1100) includes a

15 portion 1016 (1116). Each of these apparatuses A and B has

other. Fig. 1 shows only one network interface among them

faces 1010 and 1110 will be hereinafter called simply the

(1110) includes a data transmission/reception control

(1111) and a circuit control portion 1014 (1114). The

25 reception control portion 1012 (1112) and a transmission

connected mutually by a line 1200 that incorporates a first

•

5

A transmission control portion 1013 (1113) inside the physical layer control portion 1011 (1111) encodes the data it receives from the data transmission/reception

control portion 1015 (1115) in accordance with the specification of the physical layer and then outputs the data to the line 1200. On the contrary, the reception control portion 1012 (1112) executes decoding of the signal it receives from the line 1200, in accordance with the specification of the physical layer and delivers the resulting data to the data transmission/reception control portion 1015 (1115). Depending on the property of the transfer path 1201 (1202), the transmission control portion 1013 (1113) has the function of sending the signals (various control signals) that are not the data, such as a signal for confirming connectivity with the transfer path 1201 on the mating apparatus side, a signal directed to send clocks used in the physical layer control portion 1111 of the mating apparatus, etc., in accordance with the instruction of the circuit control portion 1014 (1114) during the period in which the data is not sent. The reception control portion 1012 (1112) has the functions of confirming utilizability of the transfer path, the apparatus by receiving the signal for confirming connectivity and the signal for sending the clocks flowing the transfer path 1202, confirming connectivity with the mating apparatus, the existence/absence of a failure in the transfer path or in the apparatus, and reporting the confirmation result to the line control portion 1014 (1114). In the 10 Base-T technology that uses a twist-pair cable for the line 1200, for example, the signal (control signal) described above, that is not the data, corresponds

0554089 "090100

to a link pulse. In the technology called "100 Base-FX" that uses an optical fiber for the line 1200, the signal (control signal) that is not the data corresponds to idle signals that are continuously transmitted during the period  
5 in which the data is not transmitted.

Hereinafter, all the signals that can be used for confirming the connectivity with the mating apparatus and the absence of a failure of the transfer path or the apparatus and representing whether or not the transfer  
10 paths, apparatuses and the system are utilizable, and that are not the data, such as the link pulse, and the idle signals and the data signals will be generically called the "link-up signal". The "link-up signal" is not always the signal that is transmitted in order to confirm connectivity  
15 with the mating apparatus, but includes those signals which can confirm connectivity when the data is sent, such as the data signal. The state under which the link-up signal is not detected represents the state where the signals representing utilizability, such as the signal capable of  
20 confirming connectivity with the mating apparatus, are not at all received. Such a signal follows the IEEE 802.3 Standard when the 10 Base-T technology or the 100 Base-FX technology is utilized.

The line control portion 1014 (or 1114) has the  
25 functions of receiving the connectivity confirmation information with the mating apparatus from the reception control portion 1012 (1112) and giving the instruction to transmit the signal for confirming connectivity to the

transfer path 1201 (1202) on the side of the mating apparatus and the clocks used in the physical layer control portion 1111 (1022) of the mating apparatus to the transmitting control portion 1013 (1113).

5               In the embodiment, the explanation will be given on only the case where the interface 101 of the apparatus A10000 is connected to the interface 1110 of the apparatus B1100 by the line 1200 and data communication is executed, but the present invention is not limited to such a case.

10           The operations of the interfaces of the apparatuses A1000 and B1000 other than the operation described above are not limited in this embodiment. In other words, the same processing as that of the present embodiment, or other processing, may be executed.

15           Next, the procedure for detecting a failure of the line 1200 by the apparatus A1000 (B1100) will be explained.

             First, the procedure of turn-on of the power source from the condition where the power sources of both  
20   apparatuses are cut off will be explained with reference to Fig. 2. This flowchart shows step-wise the processing sequence from turn-on of the power sources of the apparatuses to the normal operation start condition or to the normal operation stop condition in the line failure  
25   detection/reporting system of the present invention. In this case, since the apparatus A and the apparatus B operate in exactly the same way, only the operation of the apparatus A1000 will be explained as a representative

09654089 090400

example in Fig. 2.

First, when the power source is turned on (Step 2001), the line control portion 1014 instructs the transmission control portion 1013 of the physical layer control  
5 portion 1011 to transmit the link-up signal to the connecting mating apparatus B1100. Receiving this instruction, the transmission control portion 1013 starts transmitting the link-up signal to the connecting mating apparatus B1100 (Step 2002). The line control portion 1014 then activates  
10 a start timer 1017 that monitors a predetermined period of time (Step 2008). This start timer 1017 is used to judge whether or not a predetermined time has passed from the start of the processing. A certain predetermined value is set as an initial value to this timer 1017 and when a  
15 subtraction value reaches "0" with the lapse of time, the time is regarded as ending up. The initial value is the time necessary for the apparatus to become able to start the data communication after the power source of the apparatus is turned on and the necessary preparation is  
20 completed, such as 10 or 30 seconds, or up to about 1 minute depending on the apparatus. Next, the line control portion 1014 examines the condition of the reception control portion 1012 of the physical layer control portion 1011, and confirms whether or not the link-up signal is  
25 received from the transfer path 1202 (Step 2003).

Next, the following judgment is made in accordance with the result of Step 2003 (Step 2004). When the link-up signal is received, this reception is notified to



the line control portion 1014. Judging that the preparation for transmitting and receiving the data is ready in the interface 1110 of the mating apparatus B1100 and in the line 1200, the line control portion 1014 stops the start timer 1017 activated in Step 2008 (Step 2009). The interface 1010 then enters the normal operation condition (Step 2005). However, monitor of the later-appearing operation condition is not yet conducted at this point of time. After the passage of the predetermined time, the monitor operation is started to monitor the normal operation condition (Step 3001). This predetermined time is called hereby the "insensitive time", and the reason why this insensitive time is necessary will be explained later.

If the link-up signal is not yet received in Step 2004, the flow proceeds to next Step 2006 as the preparation is not ready. In this Step 2006, whether or not the time of the start timer 1017 activated in Step 2008 is up is checked. When the time is up, the preparation of the interface 1110 of the mating apparatus B1100 or the preparation of the line 1200 is judged as being not yet completed even though a sufficient time has passed. The start timer activated in Step 2008 is stopped (Step 2009), and the interface 101 enters the operation stop condition (Step 2007). However, monitor of the later-appearing operation condition is not yet conducted at this point in Step 2007. After the passage of the predetermined time, monitor of the operation condition is executed even in the operation stop mode (Step 4001). This predetermined time

001009"090100

is equal to the insensitive time described above. When the start timer 1017 activated in Step 2008 does not yet fully count up in Step 2006, the flow returns to Step 2003 because a sufficient time does not yet pass from the start of the processing, and the process steps described so far are repeated.

As described above, even when the link-up signal is not received from the reception control portion 1012 (1112) at the time of making of power, the transmission control portion 1014 (1113) keeps transmitting the link-up signal for a predetermined time. In this way, the normal operation can be executed as soon as the preparation of the mating apparatus 1100 (1000) and the line 1200 becomes ready.

Referring next to Fig. 3, the explanation will be given on the failure detection procedure when any failure occurs in the transfer path 1202 for transmitting the data from the apparatus B1100 to the apparatus A1000 or in the transmission control portion 1113 of the apparatus B1100 and data communication becomes infeasible after both apparatuses A and B start operating normally. Fig. 3 shows an example of the processing procedure from the start of the normal operation to the operation stop condition as a failure is detected. The drawing shows the processing procedure of only the apparatus A1000 because both apparatuses A1000 and B1100 have originally the same function, and the processing procedure of the apparatus B1100 is the same as that of the apparatus A1000.

15           When the link-up signal is not yet received in  
Step 3004, the line control portion 1014 judges that any  
failure occurs in the interface 1110 of the mating  
apparatus B1100 and in the line 1200 and the data communi-  
cation cannot be continued, and switches the processing to  
20 Step 3006. In this Step 3006, the reception control  
portion 1012 notifies the line control portion 1014 that it  
cannot receive the link-up signal any longer (or the line  
control portion 1014 judges the failure of the data  
communication from the condition of the reception control  
25 portion 1012). Receiving this notice, the line control  
portion 1014 instructs the transmission control portion  
1013 to stop sending the link-up signal (Step 3007). The  
transmission control portion 1013 stops sending the link-up

signal. In consequence, the interface 1010 of the apparatus A1000 enters the operation stop condition (Step 3009). In Step 3009, however, monitor of the later-appearing condition is not yet conducted at this point of time. This monitor condition of the operating condition is then entered after the passage of the predetermined time, although the mode is under the operation stop condition (Step 4001). This predetermined time is equal to the insensitive time described above.

10 In Step 3005, the reason why it is necessary to wait for the predetermined time is as follows. The link-up signal is the signal that is periodically transmitted from the transmission control portion 1113, and a predetermined time is necessary before the reception control portion 1012  
15 detects the state where these link-up signals are no longer received. The 10 Base-T technology using the twist-pair cable, for example, stipulates this predetermined time as 50 to 150 milliseconds. Therefore, if the loop of Steps 3003, 3004 and 3005 can be executed within a sufficiently  
20 shorter time than this time such as about 10 msec, it is possible to detect instantaneously that the link-up signal is no longer detected. Therefore, the loop need not be executed at a higher speed.

On the other hand, the apparatus B1100, too,  
25 executes the same processing as that of the apparatus A. The apparatus B1100 cannot directly detect the failure of the transfer path 1202. However, it can detect eventually the failure of the transfer path 1202 as the apparatus

05654035-090400

A1000 detects the failure of the transfer path 1202 and stops sending the link-up signal to the transfer path 1201. Consequently, the interface 1110 of the apparatus B enters the operation stop condition.

5               When the apparatus A (or the apparatus B) detects the occurrence of the failure in one of the transfer paths 1202 (1201) as described above, the apparatus A (B) compulsively stops sending the link-up signal to be sent to the other transfer path 1201 (1202). In consequence, the  
10 interfaces 1010 and 1110 of both apparatuses A1000 and B1100 can detect the failure when any failure occurs even at a part of the line 1200. When the cause of the failure is thereafter removed and the operation can restore the normal operation, the operation restores the normal  
15 operation either automatically, or manually through an operator, depending on the operation method of the apparatus. The explanation will be given first on the procedure of the automatic restoration.

              The processing procedure when the apparatuses  
20 A1000 and B1100 are so set as to achieve the automatic restoration will be explained with reference to Fig. 4. The drawing is a flowchart showing an example of the processing procedure from the operation stop condition to the normal operation start condition in the line failure  
25 detection/reporting system according to the present invention. First, it will be assumed that both Step 4001 of the apparatus A and Step 4101 of the apparatus B reach the operation stop condition of Step 4001 as a result of

09654089 "090400

the processing shown in Fig. 2 or the operation stop condition of Step 4001 as a result of the processing shown in Fig. 3.

In the apparatus A, first of all, the line  
5 control portion 1014 instructs the transmission control portion 1013 of the physical layer control portion 1011 to start transmission of the link-up signal after Step 4001 (Step 4003). The transmission control portion 1013 starts transmitting the link-up signal in accordance the instruc-  
10 tion (Step 4004). Thereafter, the passage of the predetermined time is waited again (Step 4005). This predetermined time is equal to the insensitive time described above. The line control portion 1014 examines the condition of the reception control portion 1012, and confirms whether or not  
15 it receives the link-up signal from the transfer path 1202 (Step 4006).

Next, the following judgment is made in accordance with the result of Step 4006 (Step 4007). When the link-up signal is received, a failure that has occurred in  
20 the interface 1110 of the mating apparatus B1100 or in the line 1200 is judged as being solved and the operation is judged as returning to the normal condition where the data communication can be made, and the apparatus A then returns to the normal operation condition (Step 4008). This Step  
25 4008 is the same as Step 2005 shown in Fig. 2. After the passage of the insensitive time, the flow proceeds to Step 4009 (that is the same as Step 3001 in Fig. 2).

When the link-up signal is not received in Step

03654089-090400

5  
10

15  
20  
25

starts transmitting the link-up signal in accordance with this instruction (Step 4107). The interface 1110 of the apparatus B returns to the normal operation condition (Step 4108). Step 4108 is the same as Step 2005 in Fig. 2.

- 5 After the passage of the insensitive time, the flow proceeds to Step 4109 (that is the same as Step 3001 in Fig. 2).

When the link-up signal is not received in Step 4104, the failure that has occurred in either the interface 1010 of the mating apparatus A1000 or the line 1200 remains unsolved and the data communication is judged as being not yet possible, the flow proceeds to Step 4105. After the passage of a predetermined time in Step 4105, the flow proceeds to Step 4103. The reason why the predetermined  
15 time is necessary is as follows. The link-up signal is the signal that is periodically transmitted from the transmission control portion 1013 (1113), and a predetermined time is necessary before the link-up signal is detected from the condition where the link-up signal is not detected  
20 in the reception control portion 1012 (1112) to the condition where the link-up signal is detected. In the 10 Base-T technology using the twist-pair cables, for example, a time of 24 to 72 milliseconds or so is necessary. Therefore, if the loop of the processing 4103, 4104 and 4105 can  
25 be executed within a sufficiently shorter period of time than this time, such as about 10 msec, it is possible to know instantaneously the detection of the link-up signal. This loop need not be executed at a higher speed.



The processing that starts from Step 4101 and confirms periodically whether or not the link-up signal, too, is received is executed with a predetermined cycle. This cycle is longer than the cycle that is determined by the insensitive time of Step 4102 and the wait time of Step 4105, and is the time sufficient to detect quickly elimination of the line failure. In the 10 Base-T technology using the twist-pair cables, for example, this cycle is believed preferably from about 0.3 to about 0.5 seconds or so. When the cycle is longer than this value, the detection is retarded even when the line failure is solved, and

The processing that starts from Step 4101 and confirms periodically whether or not the link-up signal, too, is received is executed with a predetermined cycle. This cycle is longer than the cycle that is determined by the insensitive time of Step 4102 and the wait time of Step 4105, and is the time sufficient to detect quickly elimination of the line failure. In the 10 Base-T technology using the twist-pair cables, for example, this cycle is believed preferably from about 0.3 to about 0.5 seconds or so. When the cycle is longer than this value, the detection is retarded even when the line failure is solved, and

the time necessary for restoring the normal communication becomes longer. When these two systems of processing are executed in parallel, the restoration from the failure can be detected quickly and the normal operation condition can  
5 be restored.

Fig. 7 is a diagram showing an example of the state shift of the interfaces by the line failure detection/reporting system of the first embodiment. This diagram shows the state shift of the interface 1010 of the  
10 apparatus A1000 and the interface 1110 of the apparatus B1100 explained with reference to Figs. 2 to 4.

Fig. 7 shows the state shift from "power source OFF, operation stop condition" to "normal operation condition, with monitor of operation condition" through the  
15 "normal operation condition, without monitor of operation condition", and the state shift from "power source OFF, operation stop condition" to "operation stop condition, with monitor of operation condition" through "operation stop condition, without monitor of operation condition" by  
20 the processing shown in Fig. 2. Fig. 7 shows also the state shift from "normal operation condition, with monitor of operation condition" to "operation stop condition, with monitor of operation condition" through "operation state condition, without monitor of operation condition" by the  
25 processing shown in Fig. 3. Fig. 7 shows further the state shift from "operation stop condition, with monitor of operation condition" to "normal operation condition, with monitor of operation condition" through "normal operation

09654089 090100

The reasons why the insensitive time described above is necessary will be hereby explained. It will be assumed that both apparatuses A1000 and B1100 are under the operation stop condition where the data communication cannot be made, and both apparatus return from this state to the normal operation condition with the transmission of the link-up signal by the interface 1010 of the apparatus A as being the trigger. This state is shown in Fig. 4. First, the transmission control portion 1013 transmits the link-up signal in accordance with the instruction of the line control portion 1014 of the apparatus A1000. The reception control portion 1113 of the apparatus B1010 receives this link-up signal through the transfer path 1201, and the line control portion 1114 recognizes the link-up signal reception. In contrast, the line control portion 1114 of the apparatus B1100 instructs the transmission control portion 1123 to transmit the link-up signal, and the transmission control portion 1113 transmits the link-up signal. The reception control portion 1012 of the apparatus A1000 receives this link-up signal through the transfer path 1202, and the line control portion 1014 recognizes the reception of the link-up signal. Both apparatuses can restore the normal operation condition after the processing described so far is completed. The reception control portion 1012 (1112) needs the time before it starts receiving the link-up signal and recognizes that

the transfer path becomes utilizable.

In the 10 Base-T technology using the twist-pair cable, for example, a pulse called "link pulse" is transmitted in an interval of  $16 \pm 8$  milliseconds during the period in which the data transfer is not executed. It is thus possible to recognize that the transfer path is utilizable, so long as this pulse is steadily received. Therefore, in the restoration sequence described above, the cycle in which the transmission control portion 1012 of the apparatus A1000 transmits the link-up signal and the reception control portion 1013 of the apparatus A1000 receives is maximum about 50 milliseconds. Therefore, when Step 4006 in Fig. 4 is executed immediately after the apparatus A1000 transmits the link-up signal in Step 4004, reaction from the apparatus B1100 is not in time. Consequently, the apparatus A judges that the data communication is not yet ready and stops transmitting the link-up signal with the result that both apparatuses cannot restore the normal operation condition. If latency corresponding to the insensitive time is provided after Step 4004 and then Step 4006 is executed, the apparatus B1100 can recognize the link-up signal and can react with this signal well before the reception recognition processing of the apparatus A1000, and both apparatuses can restore the normal operation condition.

When the operation comes at halt due to the occurrence of any failure under the normal operation condition of both apparatuses A1000 and B1100, this

insensitive time need not be disposed originally. This is the case, for example, where the cable that connects the apparatus A1000 to the apparatus B1010 is cut off and the signal cannot be exchanged. For, one of the transfer paths does not pass the link-up signal due to the occurrence of the failure and both apparatuses are under the operation stop condition. When it is desired to bring the system into the compulsive operation stop condition for some reason or other, the operation stop condition cannot be achieved in some cases unless this insensitive time is disposed in the same way as described above. Let's assume, for example, a case where the line is temporarily brought down for maintenance. Assuming in this case that the apparatus A1000 is under the condition of "normal operation condition, with monitor of operation condition (Step 3001)" of the state shift diagram shown in Fig. 7 and the line is intentionally brought down to achieve the operation stop condition, the apparatus A1000 enters first the condition of "operation stop condition, without monitor of operation condition (Step 3009)". It will be further assumed that setting is made at this time so that the insensitive time of the apparatus A is "0" and the apparatus A instantaneously shifts to "operation stop condition, with monitor of operation condition (Step 4001)", monitors the condition of the line and automatically restores the normal condition. As explained above, it needs time before the mating apparatus B1100 completely reaches the operation stop condition, and the apparatus A1000 is likely to wrongly

5

10

15

25

a time including a time lag of the operation time of two apparatuses that an operator may be set separately.

Next, the second embodiment of the present invention will be explained. In the second embodiment, a dual network system is constituted by using the apparatuses equipped with the line failure detection/reporting system of the present invention explained in the first embodiment so that the operation can be continued by cutting off a failure portion when such a failure occurs.

First, the construction of the apparatuses used in the system of this embodiment will be explained with reference to Fig. 6. The drawing shows an example of the apparatus equipped with the line failure detection/reporting system according to the present invention. The term "apparatus" used herein represents an inter-network apparatus such as a hub incorporating a computer, a router, a LAN switch, and so forth, in the same way as in the first embodiment.

The structural example of the apparatus shown in Fig. 6 has all the functions of the apparatus A1000 used for explaining the first embodiment with reference to Fig. 1, and includes the following three additional functions.

The first is that the apparatus has  $n$  ( $n$ : integer more than 1) network interfaces (network interfaces 1010, 1020, ..., 10 $n$ 0). The apparatus shown in Fig. 1 has at least one network interface but in this embodiment, the apparatus shown in Fig. 6 has  $n$  network interfaces. Incidentally, Fig. 6 shows only two network interfaces for

ease of explanation but it has practically  $n$  network interfaces. The individual network interfaces 1010, 1020, ..., 10 $n$ 0 are connected to separate apparatuses through lines 1210, 1220, ..., 12 $n$ 0, respectively.

5           The second is that each line control portion 1014, 1024 has line operation stop cause storage means 1018, 1028. Each line operation stop cause storage means 1018, 1028 is means for storing the cause of the stop of the operation when the operation of the line 1210, 1220  
10 controlled by its own network interface 1010, 1020 stops.

          The third is that the higher layer control portion 1016 includes group storage means 1019 for grouping a set of an interface 1010, 1020, ..., 10 $n$ 0 accommodated in its own apparatus and a line 1210, 1220, ..., 10 $n$ 0 and  
15 storing the set. Since the apparatus shown in Fig. 6 accommodates  $n$  ( $n$ : integer) interfaces and lines, for example, the first and second interfaces 1010, 1020/lines 1210, 1220 are assumed to belong to the first group, the third to fifth interfaces 1030 to 1050/lines 1230 to 1250,  
20 to the second group, and the sixth to  $n$ -th interfaces 1060 to 10 $n$ 0/lines 1260 to 12 $n$ 0, to the third group. It will be assumed hereby that each interface belongs to at least one group and at least one interface belonging to each group exists. A single interface may belong to a plurality of  
25 groups, too. The group storage means 1019 stores, for each group, which interfaces belong to each group and stores also the operation condition of each interface.

Fig. 13 shows a table structural example of the

09654089-090400



group storage means 1019. Incidentally, the network  
interfaces 1010 and 1020 will be hereinafter called merely  
the "interfaces 1010 and 1020" in this embodiment, too.  
The term "link-up signal" will be used in the same meaning  
5 as used in the first embodiment. This example represents  
to which group the line control portions 1014, 1024, ...,  
10n4 belong. Symbol "-" represents that the line control  
member is not the group member. Symbol "○" represents that  
the line control portion is the group member and is under  
10 the normal operation condition. Symbol "X" represents that  
the line control portion is the group member and is under  
the operation stop condition due to the failure. Symbol  
"△" represents that the line control portion is the group  
member but is under the operation stop condition due to the  
15 line failure in other groups. For example, the line  
control portions 1034, 1044 and 1054 belong as the group  
member to the group 2 and are under the normal operation  
condition. The line control portions 1014 and 1024 belong  
as the group member to the group 1. However, the line  
20 control portion 1014 is under the operation stop condition  
due to the failure, and the line control portion 1024 is  
under the normal operation condition.

In each interface 1010, 1020 of the apparatus  
1000 shown in Fig. 6, the processing procedure at the time  
25 of making of power is exactly the same as that of the first  
embodiment. As to the failure occurring in the line 1210  
or 1220 directly coupled with each interface 1010 or 1020,  
the differences of the processing procedure from the

First, the processing from the detection of a line failure under the normal operation condition to the operation stop condition will be explained. It will be assumed that a failure occurs in the transfer path 1212 connected to the interface 1010 from the state where the interface 1020/line 1220 belonging to the same group as at least the interface 1010/line 1210 and the line 1210 among the interface/line connected to the apparatus 1000 operate normally.

The interface 1010 starts detecting the failure in accordance with the processing procedure shown in Fig. 9, and executes the processing from Step 3001 to Step 3006 in exactly the same way as in the first embodiment. After the line control portion 1014 instructs the transmission control portion 1013 to stop transmission of the link-up signal in Step 3007, the operation stop cause storage portion 1018 stores "failure occurs in own line 1210 and operation stops" in Step 9001. The line control portion 1014 notifies the higher layer control portion 1016 of the occurrence of the failure in Step 9002. Subsequent Steps

3008 and 3009 in the interface 1010 are the same as those of the first embodiment.

On the other hand, the higher layer control portion 1016 executes the processing in accordance with the flow shown in Fig. 11. Receiving the notice of the occurrence of the failure from the line control portion 1014 of the interface 1010 (Step 11001), the higher layer control portion 1016 looks up the group storage portion 1019 and checks the numbers of all the interfaces/lines belonging to the same group as the interface 1010/line 1210 in which the failure develops. If the line control portion 1014 belongs to a plurality of groups, the numbers of the interfaces/lines belonging to the groups are checked for all the groups to which the line control portion 1014 belongs, and then the instruction to compulsively stop the operation is given to all the corresponding interfaces/lines (Step 11003). The higher layer control portion 1016 updates the table entry of the group storage portion 1019 and stores the stop condition due to the occurrence of the failure and the compulsive stop condition (Step 11004). The higher layer control portion 1016 finishes the processing in this way (Step 11005).

Receiving the instruction to enter compulsively the operation stop condition, the line control portion 1024 executes the processing in accordance with the flow shown in Fig. 10. First, the line control portion 1024 receives the operation stop instruction under the normal condition from the higher layer control portion 1016 (Step 3001).

Consequently, the line control portion 1024 instructs the transmission control portion 1023 to stop transmission of the link-up signal no matter whether or not the failure occurs in the line connected to its on interface 1020 (Step 5 3007). At the same time, the line control portion 1024 causes the line operation stop cause storage means 1028 to store "operation is compulsively stopped due to failure of line 1210 belonging to other interface 1010". The transmission control portion 1023 stops transmitting the link-up 10 signal in accordance with the instruction from the line control portion 1024, and the interface 1020 enters the operation stop condition (Step 3009). In other words, the interface 1020 stops its operation by the instruction from the higher layer control portion 1016 but not by the 15 detection of the failure in its own line. The insensitive time is provided immediately after the operation enters the operation stop condition in both interfaces 1010 and 1020 in the same way as in the first embodiment (Step 3009).

Next, the processing from the operation stop 20 condition to the detection of the recovery of the failure and then to the restoration to the normal operation condition will be explained. It will be assumed hereby that the transmission line 1212 restores the normal condition from the failure under the condition where at 25 least the interface 1010/line 1210 and the interface 1020/line 1220 belonging to the same group as the line 1210 keep stopping the operation due to the failure of the line 121 in accordance with the procedure described above. This

0010050" 63045960

restoration processing varies depending on the operation stop causes stored in the line operation stop cause storage means of the corresponding line control portion.

After entering the operation stop condition, the interface including the line, in which the failure occurs, examines the content of the line operation stop cause storage means 1018 of the line control portion 1014. In this case, the content reads as "failure occurs in own line 1210 and operation stops". Therefore, the interface 1010 detects the restoration from the failure in exactly the same processing procedure as the processing procedure shown in Fig. 4, and executes the restoration processing. When the line 1210 is restored and reaches the processing 4008 or 4108, the line control portion 1014 reports this effect to the higher layer control portion 1016.

The interface 1020 belonging to the same group as the line 1210/interface 1010 in which the failure occurs, too, enters the operation stop condition, and then examines the content of the line operation stop cause storage portion 1028. In this case, the content reads as "operation is compulsively stopped due to failure of line 1210 belonging to other interface 1010". Therefore, the interface 1020 does not execute the processing procedure shown in Fig. 4 for executing the spontaneous restoration processing. The reason why the interface 1020 does not execute the spontaneous restoration processing is because no failure occurs in itself and if the processing procedure is executed, the interface 1020 is restored instantaneously

0010060" 6804560

On the other hand, the higher layer control portion 1016 executes the processing in accordance with the flow shown in Fig. 12. Receiving the restoration notice from the interface 1010 that has been under the operation stop condition due to the occurrence of the failure (Step 12001), the higher layer control portion 1016 examines the numbers of all the interfaces/lines belonging to the same group as the recovered interface 1010 while looking up the group storage means 1019 (Step 12002). If the line control portion 1014 belongs to a plurality of groups, the higher layer control portion 1016 examines the numbers of the line control portions of all the groups to which this line control portion 1014 belongs. Thereafter, the higher layer control portion 1016 releases the compulsive operation stop instruction to all the corresponding interfaces/lines, and instructs the re-start of the operation (Step 12003). Here, the interface 1020 corresponds to the object interface that receives the instruction. The higher layer control portion 1016 updates the table entry of the group storage means 1019 and records the normal operation condition. The interface 1020 does not have executed so far the spontaneous restoration processing as described above. Receiving the instruction from the higher layer control portion 1016, however, it executes exactly the same processing procedure as the processing procedure shown in Fig. 4, detects the restoration from the failure and

Fig. 8 shows the state shift of the interfaces by the line failure detection/reporting system of the second embodiment. The drawing shows the state shift of the interface 1110 of the apparatus 1000 explained above.

Fig. 8 shows further the state shift from "normal operation condition, with monitor of operation condition"

to "operation stop condition, without monitor of operation condition" by the processing shown in Fig. 10. When the cause of the operation stop is the failure of other line inside the group, the operation is compulsively stopped, and the state shifts to "operation stop condition, without monitor of operation condition, waiting for instruction from higher layer control portion 1016". Further, the state shifts to "operation stop condition, with monitor of operation condition" due to the instruction of the operation direction from the higher layer control portion 1016, and thereafter shifts to the normal operation condition by the processing shown in Fig. 4.

The processing procedure for executing the line failure detection notice by assembling the network by using the apparatus having the additional functions described above will be explained with reference to Fig. 5. Fig. 5 shows a structural example of the network using the apparatuses equipped with the line failure detection/reporting system of the embodiment explained with reference to Fig. 6. First, each portion will be explained.

Each of the apparatuses C5001, D5002, E5003, F5004, G5005, H5006 and J5007 is the apparatus equipped with the line failure detection/reporting system of the present invention explained with reference to Fig. 6. Transfer paths 5101 to 5124 are transfer paths for connecting mutually these apparatuses C5001 to J5007. Arrows of the transfer paths in the drawing represent the data transfer direction. Each odd-numbered transfer path and a

09654089 090100



transfer path having a number greater by "1" than the former are the transfer paths that connect the apparatus of the same combination in opposite directions, and the set of these two transfer paths constitutes one line. In this embodiment, the transfer path 5104 for transmitting data from the apparatus C5001 to the apparatus E5003 is called the "transfer path CE5104" and the transfer path 5103 for transmitting the data from the apparatus E5003 to the apparatus C5001, on the contrary, is called the "transfer path EC5103". The pair of the transfer path CE5104 and the transfer path EC5103 is called the "line EC5103" or the "line CE5104". The system shown in Fig. 5 employs the redundant construction, in which the apparatus E5003 and all the lines connected directly to this system constitute the "0" system and the apparatus F5004 and all the lines connected directly to this apparatus constitute the "1" system, by taking the apparatuses E5003, F5004 and the lines connecting to these apparatuses, into specific attention. In Fig. 5, thick lines represent the "0" system and double lines represent the "1" system. Communication is conducted generally by using either one of the "0" and "1" systems with the other being a standby system. When any one of the apparatuses C5001, D5002, E5003 and F5004 is broken, or when any of the lines connecting mutually the apparatuses G5005, H5006, J5007 and the apparatuses E5003 and F5004 is broken, for example, the whole system switches to the standby system and a bypass route is established by utilizing other lines/apparatuses. In consequence, the

Grouping and setting inside each apparatus in this embodiment will be explained. In the apparatus C5001, the line EC5103 belongs to the group "0" and the line FC5105 does to the group "1". In the apparatus D5002, the line ED5111 belongs to the group "0" and the line FD5109 does to the group "1". All the lines directly connected to the apparatus E5003 belong to the group "0" and all the lines directly connected to the apparatus F5004 belong to the group "1". In the apparatus G5005, the line GE5113 belongs to the group "0" and the line GF5119 does to the group "1". In the apparatus H5006, the line HE5115 belongs to the group "0" and the line HF5121 does to the group "1". In the apparatus J5007, the line JE5117 belongs to the group "0" and the line JF5123 does to the group "1". The line 5102 of the apparatus C5001, the line 5107 of the apparatus D5002 and the lines for accommodating computers in the apparatuses G5005, H5006 and J5007, that are not

described so far, do not belong to both of the groups "0" and "1". The lines and the interfaces belonging to the group "0" constitute the "0" system described above. The lines and the interfaces belonging to the group "1" constitute the "1" system described above. Incidentally, the number for identifying the group need not be always unified between the apparatuses so long as a consistent management is made inside each apparatus. However, the explanation will be hereby given by using the unified numbers.

It will be assumed that only the lines belonging to the group "0" are used in practice by the operation of the afore-mentioned system switching protocol in the system shown in Fig. 5 when all the apparatuses and lines operate normally. In other words, when the data communication needs be made through the apparatus G5005 and the apparatus C5001, the data is assumed to pass through the apparatus G5005, the line GE5113, the apparatus E5003, the line EC5103 and the apparatus C5001. Here, the explanation will be given on the processing when the failure occurs in the transfer path GE5113 between the apparatus E5003 and the apparatus G5005.

It is the apparatus E5003 positioned on the reception side of the transfer path GE5113 that first detects the failure. Detecting the failure, the apparatus E5003 stops transmitting the link-up signal to the transfer path EG5114 in accordance with the state shift shown in Fig. 8, reports the failure to the apparatus G5005, stops

the operation of the interface accommodating the line EG5114 of the own apparatus and reports the failure occurrence to the higher layer control portion inside the apparatus. Since the line EG5114 belonging to the group

5 "0" stops operating due to the failure, the higher layer control portion inside the apparatus E5003 instructs all the other interfaces of the same group inside the apparatus to compulsively stop the operation. In this case, since all the interfaces of the apparatus G5003 belong to the

10 group "0", all the lines other than the line EG5114, in which the failure occurs, are brought compulsively into the operation stop condition. The apparatuses C5001, D5002, H5006 and J5007 connected directly to the apparatus G5003 recognize this state as the line failure and stop the

15 operation of the lines EC5103, ED5111, EH5116 and EJ5118, respectively. The lines that belong to the group "0" managed internally by the respective higher layer control portions inside these four apparatuses are only those lines which are directly connected to the apparatus E5003.

20 Therefore, the processing finishes at this point. However, the apparatus G5005 detects the operation stop of the transfer path EG5114 by the apparatus E5003, brings the interface accommodating the line EG5114 into the operation stop condition and at the same time, reports the failure

25 occurrence to the higher layer control portion inside the apparatus. Inside the apparatus G5005, it is only the line EG5114 that belongs to the group "0" managed by the higher layer control portion. Therefore, the processing finishes

at this point. All the lines belonging to the group "0" stop operating due to the processing described so far in the system shown in Fig. 5, and the apparatus E5003 is cut off from the system. The time from the occurrence of the failure in the transfer path GE5113 to the arrival at this state is as high as about 0.5 seconds in the 10 Base-T technology using the twist-pair cable, for example. Thereafter, the occurrence of the line failure is reported to the system switching protocol, and the operation system of the whole system is switched, so that the system can continue the normal operation. Incidentally, when the apparatus E5003 itself undergoes breakage and stops operating, too, the same processing procedure is executed.

The system switching protocol for accomplishing the redundant construction system is accomplished in many cases by a layer that is relatively higher than the physical layer in an OSI (Open System Interconnection) reference model, such as a network layer and a transport layer. Therefore, there is a case where this protocol does not operate smoothly when any failure occurs at only a limited part of the system and a relatively long time is necessary before the whole system is switched. In the present system, however, since the processing is executed at the level of the physical layer, system switching can be made at a high speed and reliably by using the apparatuses according to the present system.

Incidentally, the explanation given above assumes the case where the whole system is switched when the

0054035 050400

failure occurs even at one position. However, it may be possible to employ the method of setting the groups so that only the failure portion can be cut off and the system can be switched partially. For example, setting is made so

5 that the lines CE5104 and EG5144 belong to the group "0", the lines CF5106 and FG5120 belong to the group "1", the lines CE5104 and EH5116 belong to the group "2", the lines CF5106 and FH5122 belong to the group "3", the lines CE5104 and EJ5118 belong to the group "4" and the lines CF5106 and

10 FJ5124 belongs to the group "5". Generally, the operation is conducted using the groups "0", "2" and "4". When the failure occurs in the transfer path GE5113 in the same way as in the example given above, only the group "0" is switched to the group "1" while the other groups "2" and

15 "4" continue to operate as such. In this way, it is possible to continue the operation by only switching the group, in which the failure occurs, without switching the whole groups. In this case, the lines CE5104 and CF5114 belong to a plurality of groups, but the processing

20 procedure remains the same.

The explanation given above is based on the assumption that the apparatuses C5001 to J5007 shown in Fig. 5 are the inter-network apparatuses, but they may be computers as described in the starting paragraph of the

25 second embodiment.

The two embodiments of the present invention have thus been explained, and this explanation deals with only the application to the IEEE802.3 system network. However,

20           When link aggregation, that is the technology  
under the standardization work in IEEE802.3ad, is utilized,  
a plurality of physical lines for connecting two appara-  
tuses can be aggregated into one logical line and communi-  
cation can be conducted. Therefore, let's consider a case  
25 where the system of the present invention is applied to the  
lines using this technology. A functional block for  
executing the failure detection/reporting processing of the  
first embodiment is provided to each physical line, and a

20           When link aggregation, that is the technology  
under the standardization work in IEEE802.3ad, is utilized,  
a plurality of physical lines for connecting two appara-  
tuses can be aggregated into one logical line and communi-  
cation can be conducted. Therefore, let's consider a case  
25 where the system of the present invention is applied to the  
lines using this technology. A functional block for  
executing the failure detection/reporting processing of the  
first embodiment is provided to each physical line, and a

Incidentally, it is possible to accomplish the whole, or a part, of the functions of the network interface shown in Figs. 1 and 6 by a one-chip semiconductor integrated circuit.

Incidentally, it is possible to accomplish the whole, or a part, of the functions of the network interface shown in Figs. 1 and 6 by a one-chip semiconductor integrated circuit.



CLAIMS:

1. A method for sending a notice of failure detection in a system connecting first and second network interfaces incorporated in first and second apparatuses by a line including a transmission side transfer path and a reception side transfer path, wherein:

said first and second network interfaces periodically transmit a utilizability signal representing the failure of said line or an own apparatus to said transmission side transfer line; and

said first apparatus judges an occurrence of a failure when it cannot detect said utilizability signal from said second network interface of said second apparatus as a mating apparatus for a predetermined period from said reception side transfer path, and said first network interface of said first apparatus stops transmitting said utilizability signal to be transmitted to said second network interface of said second apparatus and thus reporting the occurrence of the failure to said second apparatus.

2. A method for sending a notice of failure detection according to claim 1, wherein:

when said first network interface of said first apparatus stops transmitting said utilizability signal, said first apparatus starts transmitting periodically said utilizability signal to said reception side transfer path after the passage of a predetermined period, monitors thereafter whether or not said utilizability signal can be detected on said reception side transfer path, judges that

007060" 6804590

the failure is not yet restored when said first apparatus cannot detect said utilizability signal for the predetermined period on said reception side transfer path, and stops again transmitting said utilizability signal that has been transmitted periodically to said transmission side transfer path; and

when said first apparatus can detect continuously said utilizability signal on said reception side transfer path for a predetermined period, on the other hand, said first apparatus judges that the failure is restored, continues thereafter to transmit periodically said utilizability signal, and starts again the data communication.

3. A method for sending a notice of failure detection according to claim 1, wherein:

at least one of said first and second apparatuses includes a plurality of network interfaces as a group, and stops transmitting said utilizability signal from all of said network interfaces inside said group when the failure occurs in one of said network interfaces inside said group or in said reception side transfer path connected to said network interface, and said utilizability signal cannot be detected from said reception side transfer path.

4. A method for sending a notice of failure detection according to claim 2, wherein:

at least one of said first and second apparatuses includes a plurality of network interfaces as a group, and stops transmitting said utilizability signal from all of said network interfaces inside said group when the failure

0054089 090100

occurs in one of said network interfaces or in said reception side transfer line connected to said network interface, and said utilizability signal cannot be detected from said reception side transfer path.

5. A method for sending a notice of failure detection according to claim 1, wherein:

when said first apparatus cannot receive said utilizability signal of said transfer path on said reception side transfer path for receiving data from said network interfaces of said second apparatus for the predetermined time and judges that the failure occurs, said first apparatus intentionally stops transmitting said utilizability signal that has been transmitted periodically to said transfer path for transmitting the data to said interfaces of said second apparatus;

said first apparatus starts transmitting periodically said utilizability signal to said transmission side transfer path after the passage of the predetermined time, and thereafter monitors whether or not said utilizability signal can be detected on said reception side transfer path;

when said utilizability signal cannot be detected on said reception side transfer path for the predetermined time, said first apparatus judges that the failure is not restored, stops again intentionally transmitting said utilizability signal that has been transmitted periodically to said transmission side transfer path, starts again transmitting periodically said utilizability signal to said

0954089-090400

when said utilizability signal can be detected continuously on said reception side transfer path for the predetermined time, said first apparatus judges that the failure is restored, keeps thereafter periodical transmission of said utilizability signal, and starts again the data communication.

7. A method for sending a notice of failure detection according to claim 2, wherein the data communication is started again simultaneously with restart of transmission of said utilizability signal of said transfer path.

a transmission control portion for periodically transmitting a utilizability signal representing a failure of said line or said apparatus associated with said line to said transmission side transfer path from said network interface to the other of said network interfaces; and

a line control portion for stopping transmission of said utilizability signal to be transmitted to said interface, to said transmission control portion by judging that a failure occurs when a reception control portion cannot detect said utilizability signal from the other of said interfaces from said reception side transfer path for a predetermined time.

9. A network interface according to claim 8, wherein at least said line control portion is produced into a one-chip semiconductor integrated circuit.

10. A network apparatus in a network system having one or more network interfaces incorporated in two apparatuses and connected by a line including a transmission side transfer path and a reception side transfer path electrically isolated from one another, wherein:

said network interfaces are classified into groups, at least one of said network interfaces belongs to each of said groups, and a network interface is allowed to belong to a plurality of said groups; and

each of said network interfaces includes means for stopping transmission of a utilizability signal to be transmitted to said transmission side transfer path when a failure is judged as occurring in said reception side transfer path, and means for stopping transmission of said utilizability signal to said transmission transfer path in all of said network interfaces belonging to the same group as said network interface when the failure is detected in at least one network interface belonging to a group

004060" 63045960

associated with its own network interface.

11. A network apparatus according to claim 10, wherein each of said network interfaces includes means for continuing transmission of said utilizability signal to said transmission side transfer path and starting again simultaneously data communication when the failure of said reception side transfer path is judged as being restored, and means for starting transmission of said utilizability signal to said transmission side transfer line in all of said network interfaces belonging to the same group as said interface when failure restoration is detected after the passage of a predetermined time from the failure detection.

12. A network system having redundant routes of a plurality of systems constituted by using said network apparatus according to claim 10, for cutting off reliably and at a high speed a failure occurrence portion and assisting switching of said redundant routes at the time of occurrence of the failure by setting groups in accordance with a switching unit at the time of the occurrence of the failure.

004050 6804960

ABSTRACT OF THE DISCLOSURE

To reliably detect a failure even when the failure occurs at a part of a line or in a mating apparatus, a transmission control portion transmits a link-up signal for confirming connection by the mating apparatus to a transfer path during the period in which data is not transmitted, in accordance with the instruction from a line control portion. Receiving the link-up signal flowing through the transfer path, the reception control portion confirms that no failure exists in the mating apparatus and in the transfer path or in the apparatus, and sends this notice to the line control portion. When not receiving the link-up signal, the line control portion reports the failure to the mating apparatus by intentionally stopping transmission of the link-up signal through another transfer path. To examine the operation condition of the line, a specific signal that can be sent during the period in which the data is not transmitted, and represents whether or not the line is utilizable is used as the link-up signal.

001060" 6804560

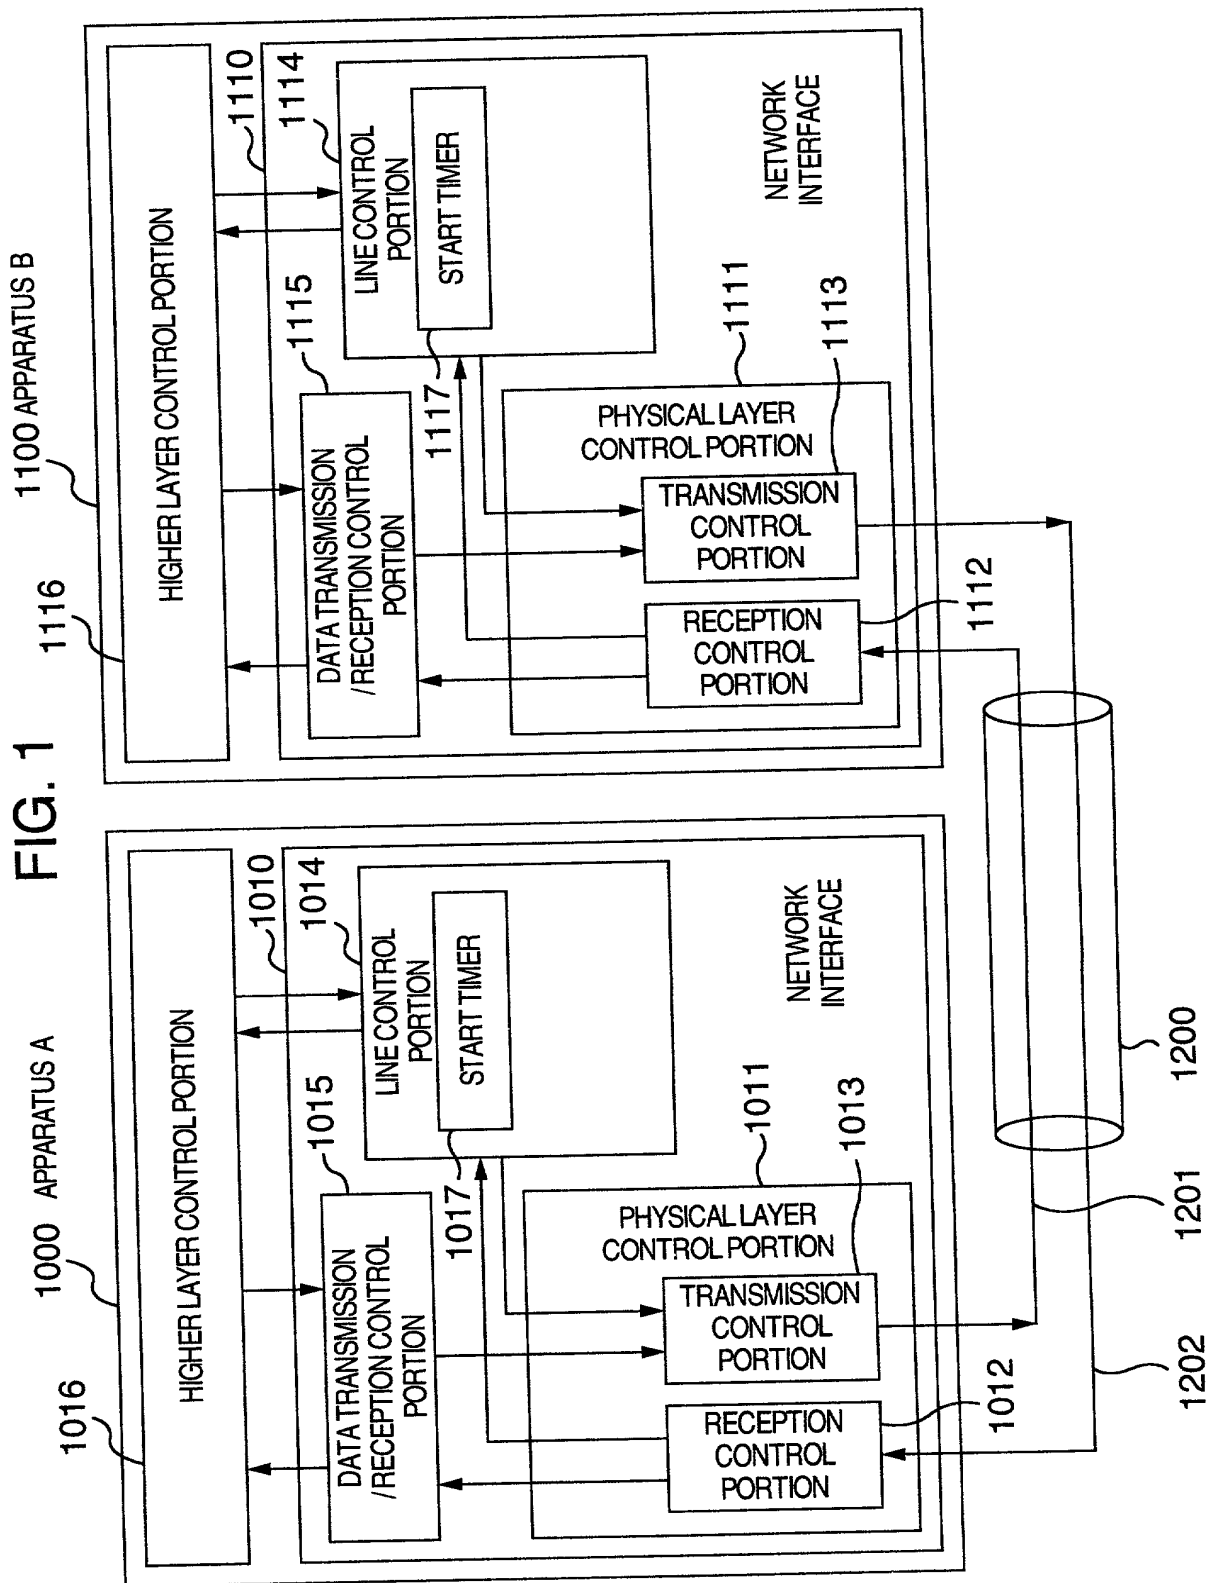




FIG. 2

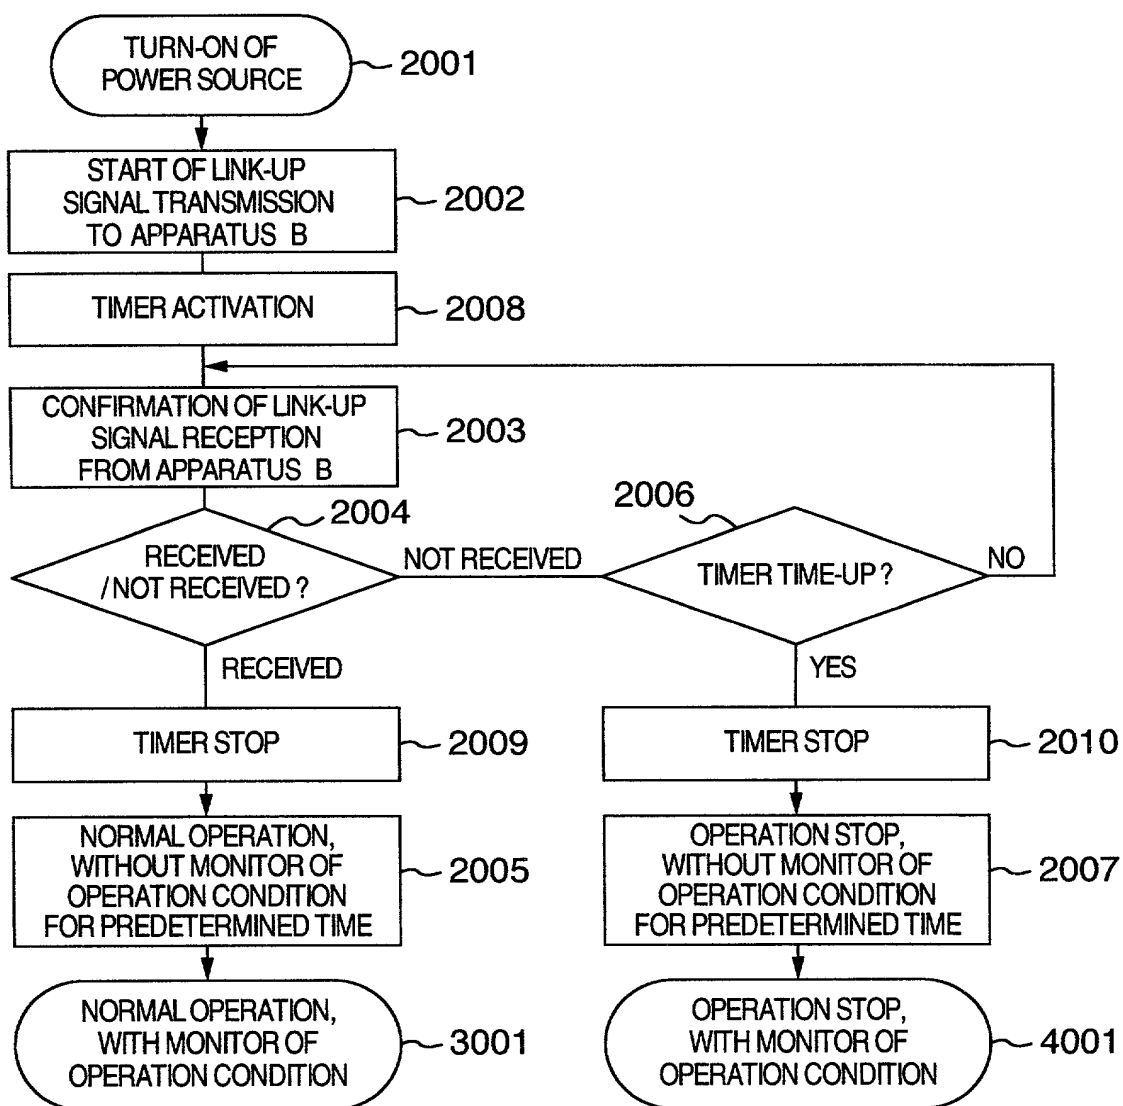


FIG. 3

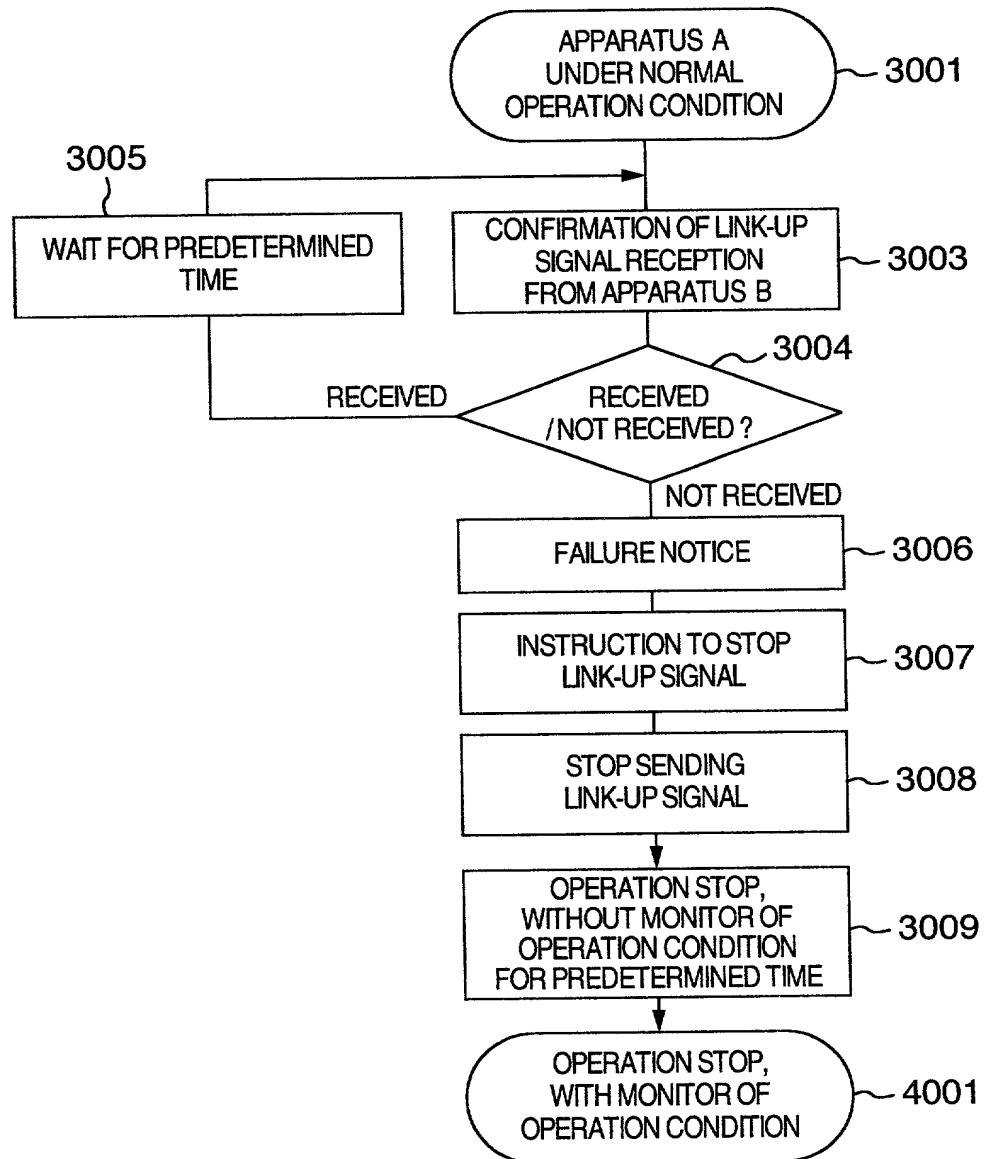


FIG. 4

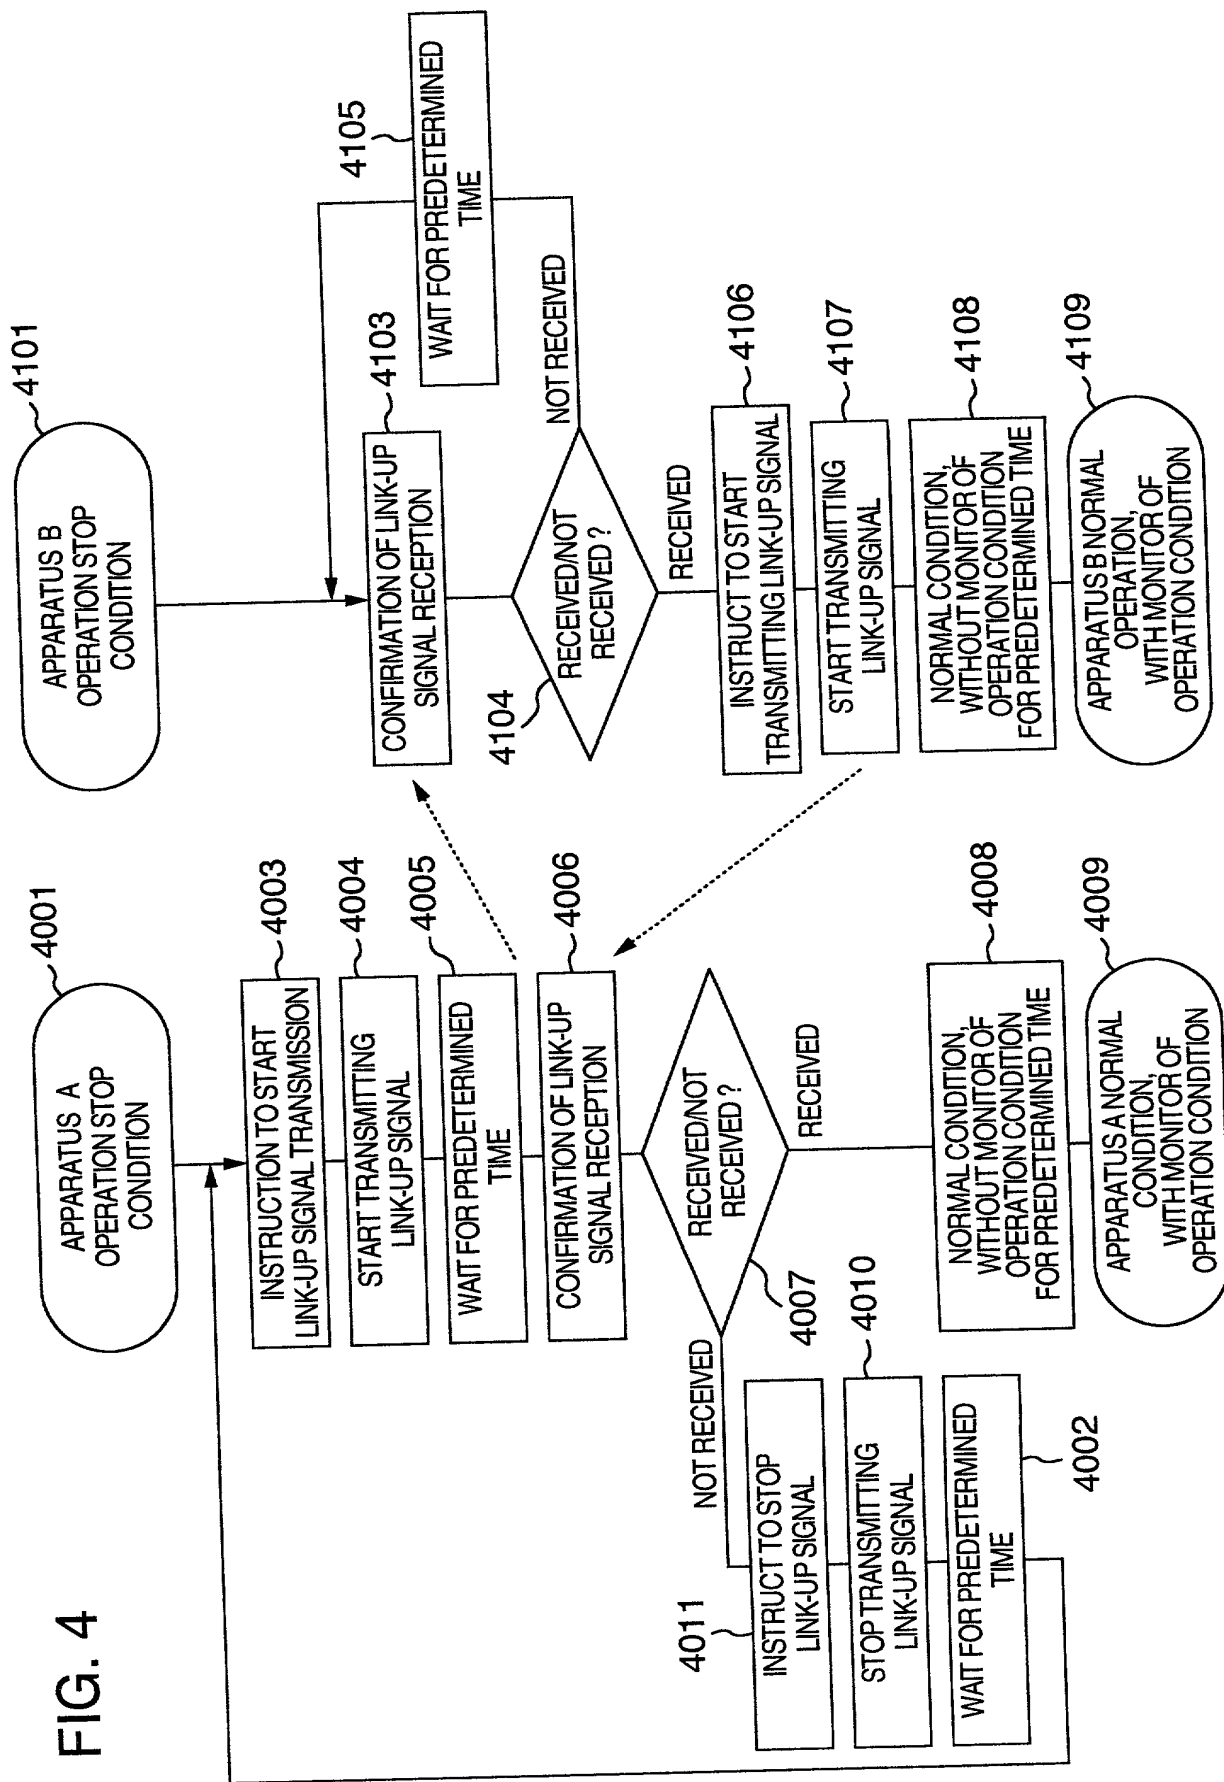


FIG. 5

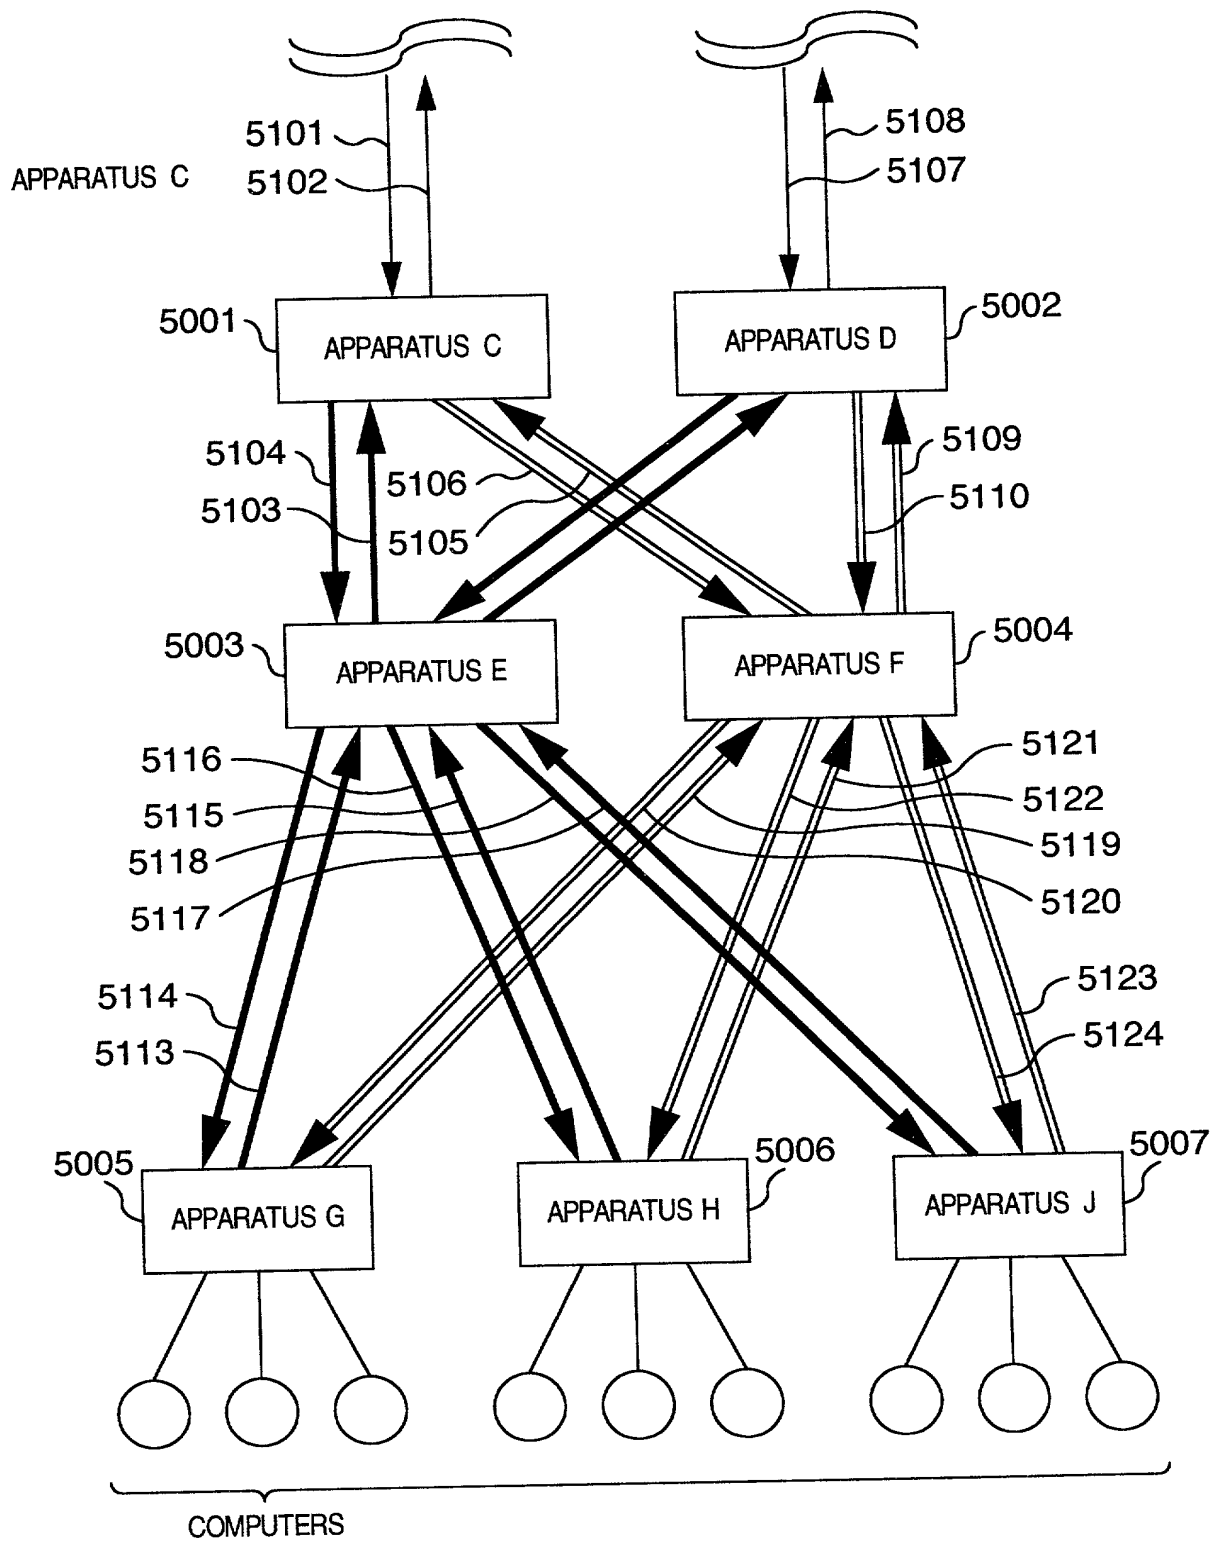






FIG. 8

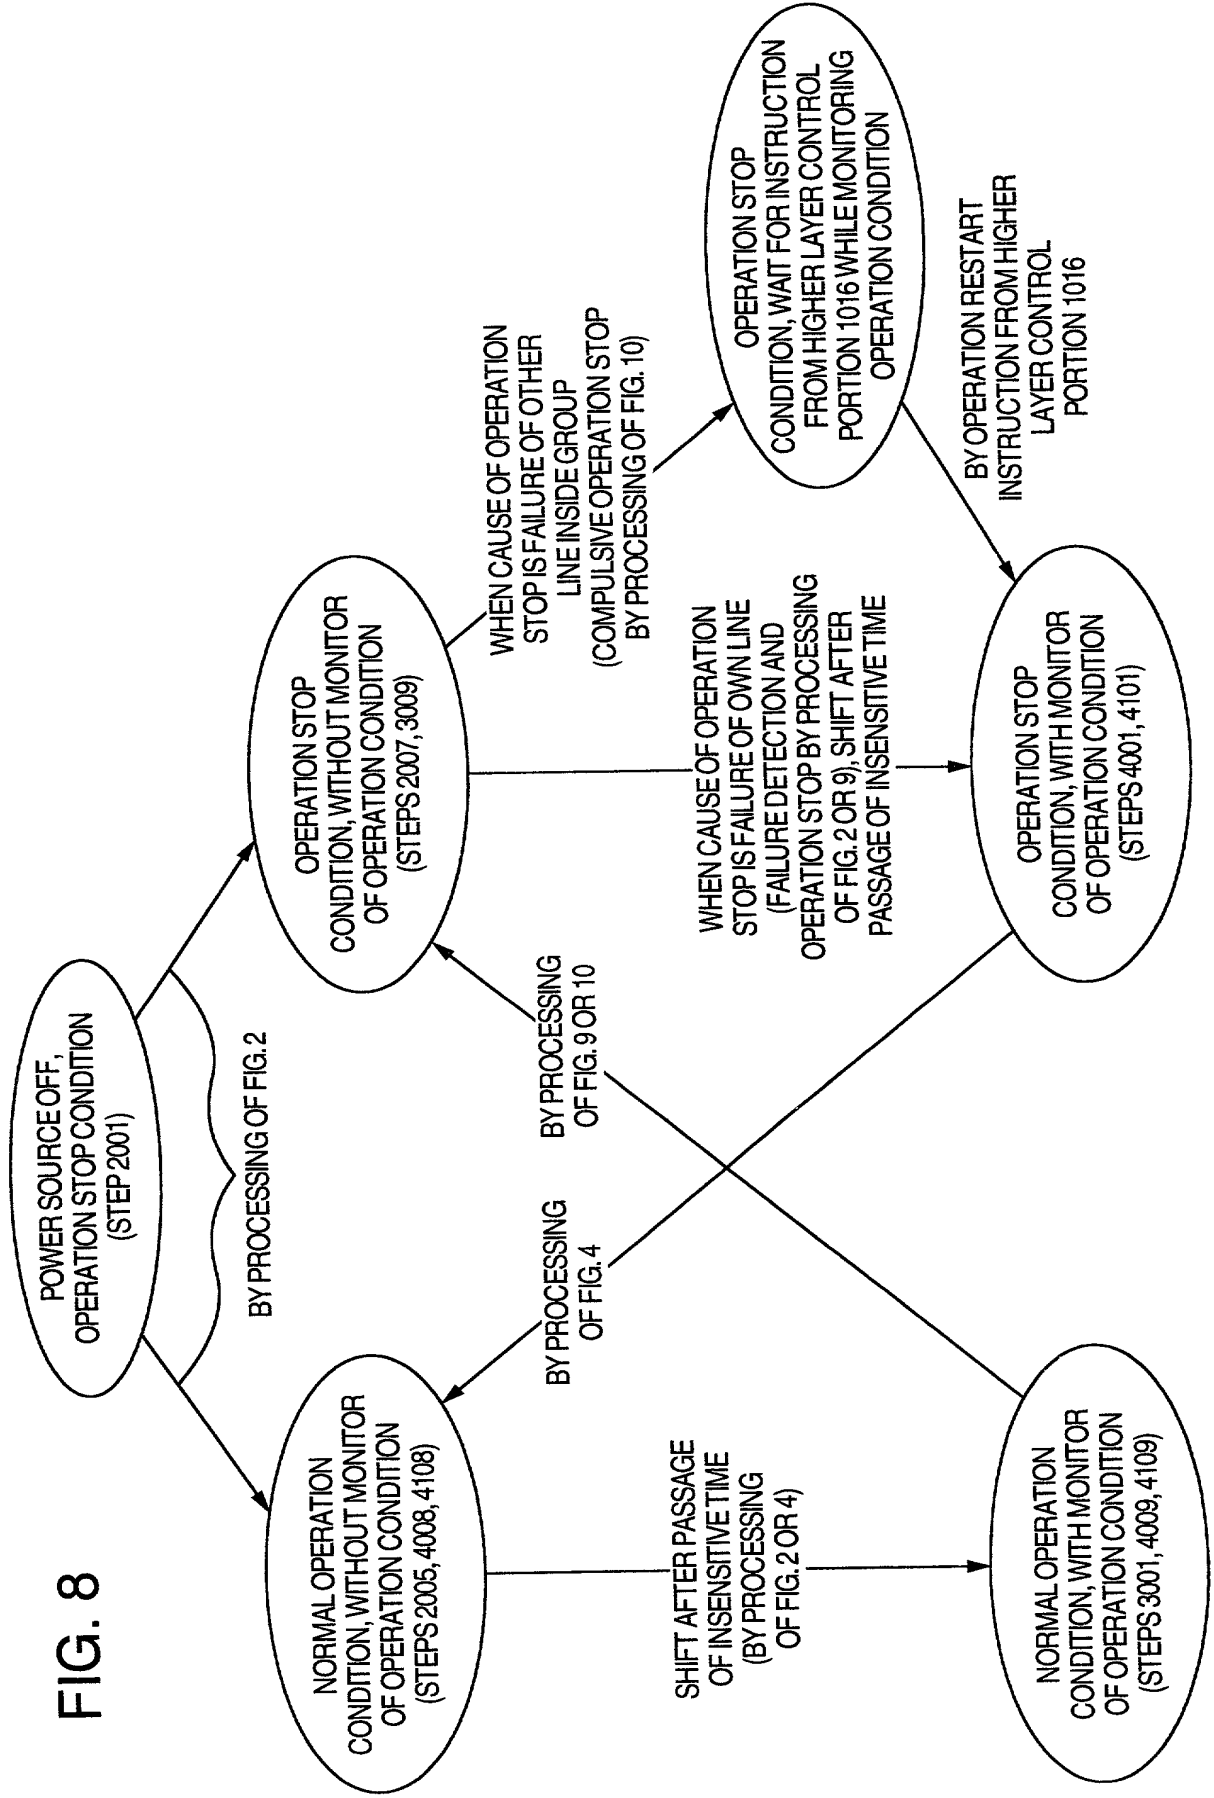


FIG. 9

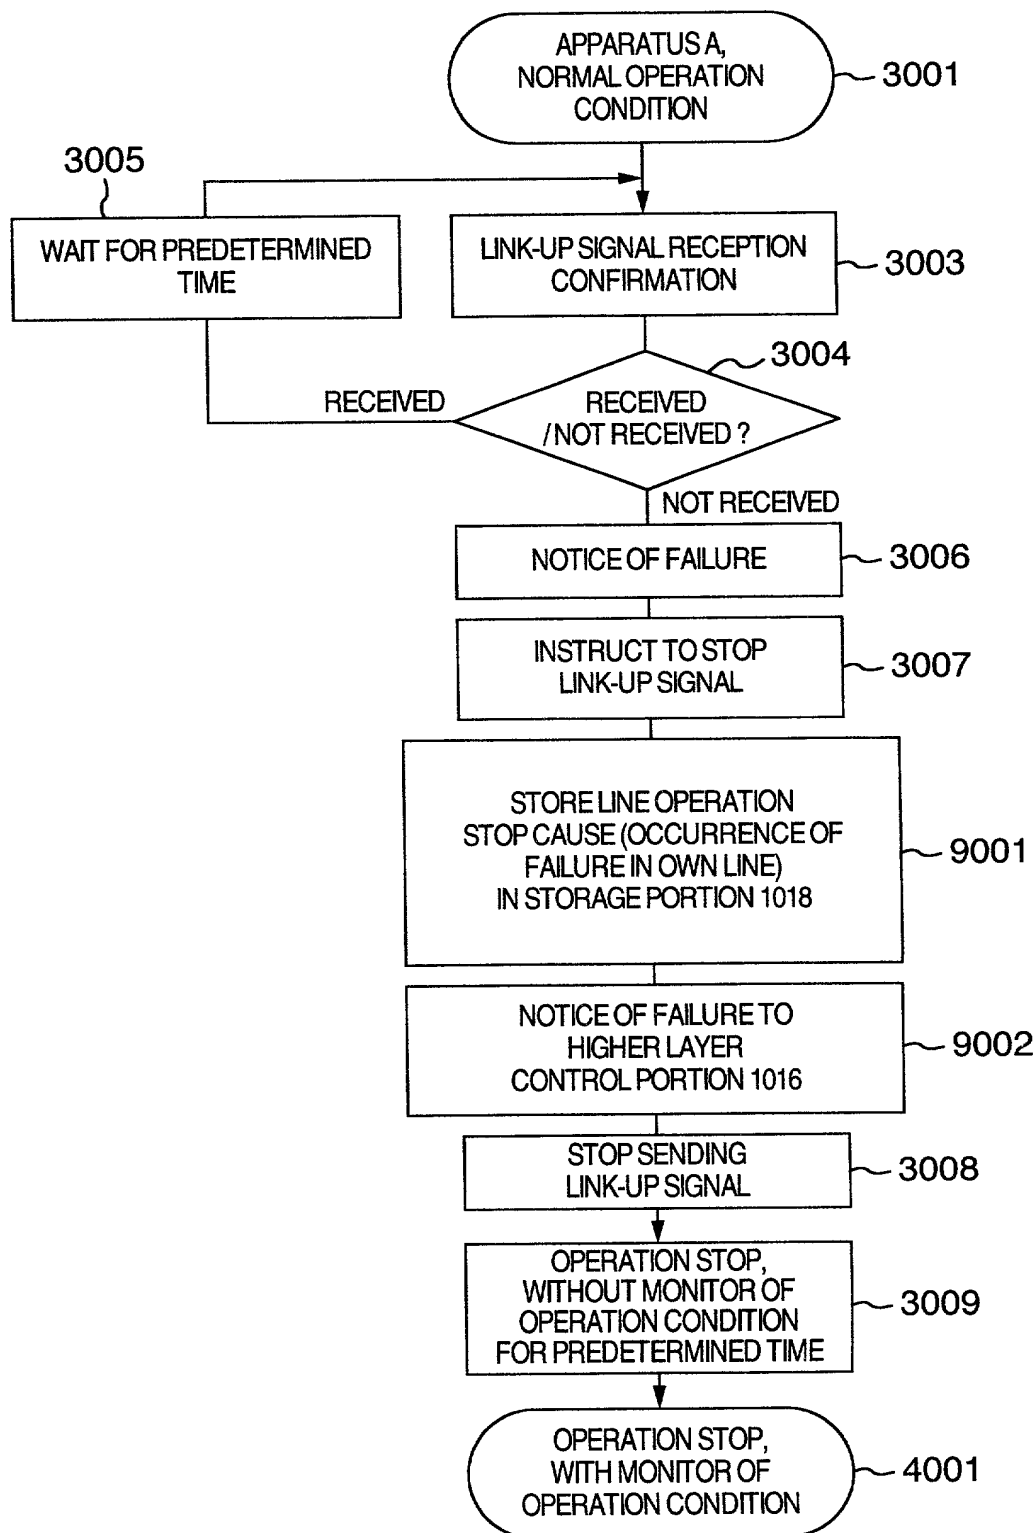




FIG. 10

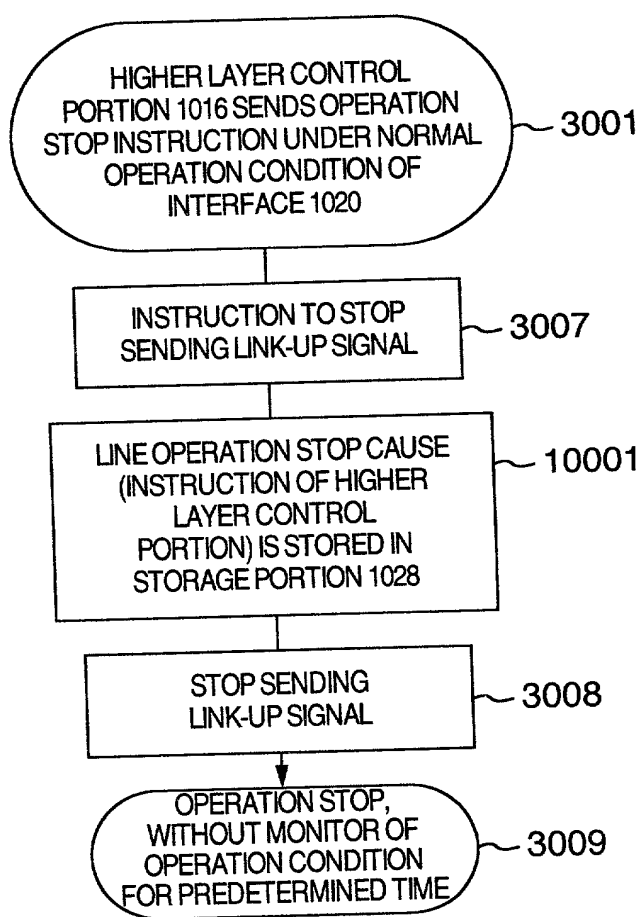




FIG. 12

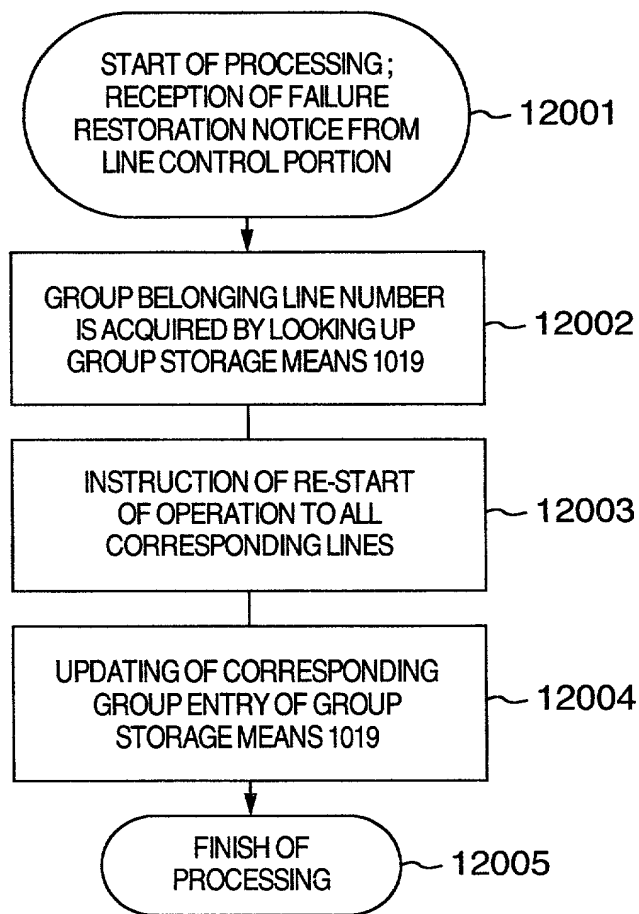


FIG. 13

GROUP NO. LINE CONTROL PORTION NO.	1	2	3	4	5	...
1014	X	—	—	—	—	...
1024	Δ	—	—	—	—	...
1034	—	○	—	—	—	...
1044	—	○	—	—	—	...
1054	—	○	—	—	—	...
1064	—	—	○	—	—	...
.	.	.	.	.	.	.
.	.	.	.	.	.	.
.	.	.	.	.	.	.

- NOT GROUP MEMBER
- GROUP MEMBER, UNDER NORMAL OPERATION
- X GROUP MEMBER, OPERATION STOP DUE TO FAILURE
- Δ GROUP MEMBER, OPERATION STOP DUE TO FAILURE IN OTHER LINE INSIDE GROUP